Customer:_____ Project:_____ Page:_____of_____

Single Opening Quote/Order Form

Osprey FRP Door

(this form is NOT required to request a quote or to place an order)

PHOENIX DOOR SYSTEMS

Door Only ☐ Frame Only ☐ Both ☐

White ☐ Haze Gray ☐ Beige ☐ Brown ☐ Dark Bronze ☐ Primer ☐

Fire Rating: 90M ☐ 60M ☐ 45M ☐ 20M ☐ Custom Color ☐

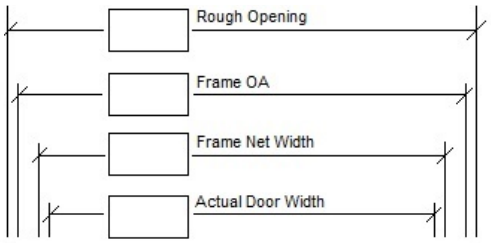

NOTE: Please indicate only 1 width and 1 height measurement on the diagram. We'll calculate the rest from there.

Standard Jamb Profiles

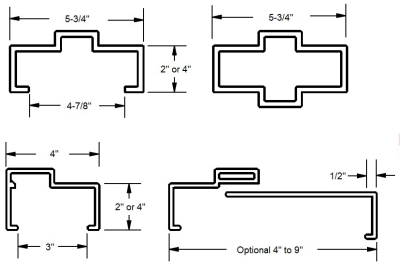

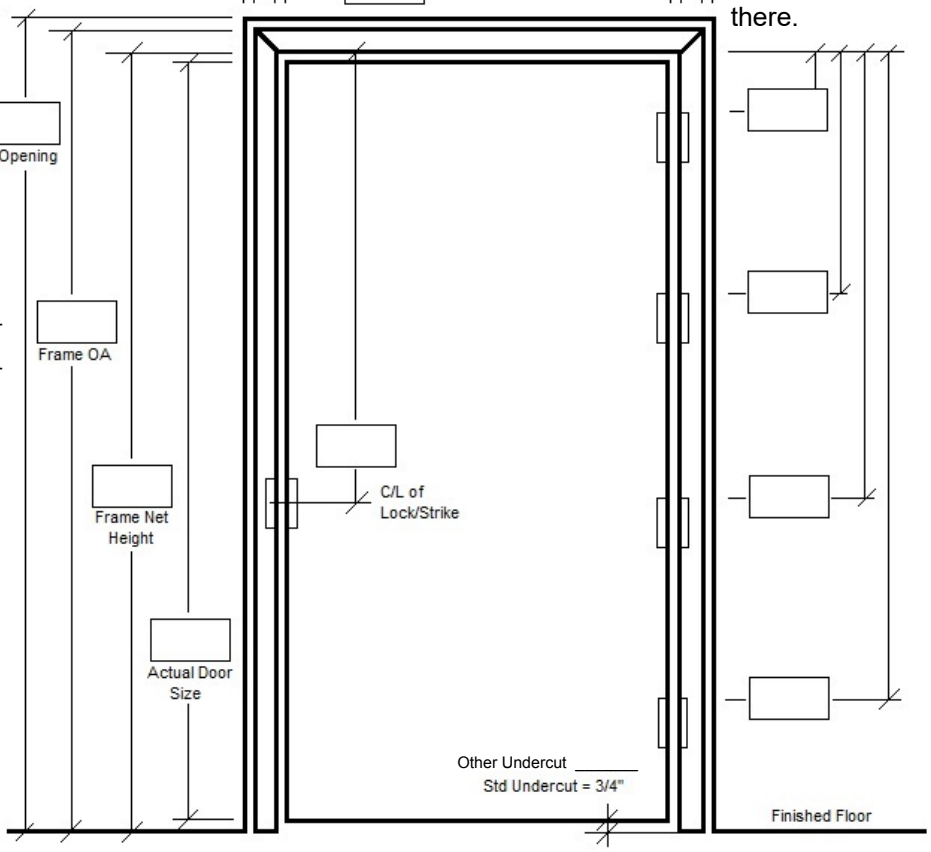

Jamb Depth: 5-3/4" ☐ Wall Thickness_____

Jamb Faces: 2" ☐ Other_____

Head Face: 2" ☐ 4" ☐

Welded ☐ KD ☐

EWA-Masonry ☐ Wire ☐

EWA-Tapcon ☐ New Stud Wall ☐

EWA-Wood lag ☐ KD Compression ☐

EWA-Screw mach ☐ Base Anchors ☐

Cutout #1

Width_____ Height_____

Visible ☐ Order Size ☐

Centered ☐ or Side Margin:_____

Top Margin (lite)_____

Bottom Margin (louver)_____

Type: Tempered ☐ Polycarb ☐

"V" Louver ☐ By Others ☐

Thickness: 1/4" ☐ 1" (Insul) ☐

Cutout Only ☐ By Others ☐

Cutout #2

Width_____ Height_____

Visible ☐ Order Size ☐

Centered ☐ or Side Margin:_____

Top Margin (lite)_____

Bottom Margin (louver)_____

Type: Tempered ☐ Polycarb ☐

"V" Louver ☐ By Others ☐

Thickness: 1/4" ☐ 1" (Insul) ☐

Cutout Only ☐

Approved Hardware Schedule Attached ☐ Manuf. Locations_____

Hinge(s):_____

Cylinder Lock:_____

Deadbolt:_____

Mortise/Card Lock:_____

Exit Device/Panic: _____Trim: _____

Flush/Surface Bolts: _____

Notes/Other:_____

Quantity	Handing	Tag #